Temporary Area LED Lighting

08-00471
22,500 Lumen (150W)

FEATURES

- 360 Degree Light Output
- Powerful SMD LED Brightness
- 150 Lumens Per Watt Efficiency
- LED Life Span of 50,000 Hours
- Stainless Steel Protective Metal Guard
- Heavy Duty Folding Metal Spring Hook
- Rugged Die-Cast Aluminum Heat Sink
- 5-15 Receptacle to Connect Additional Lights





SPECIFICATIONS

- 22,500 Lumens/150 Watt
- 10ft 14/3 SJTW Power Cord w/ 5-15 Plug
- 1ft 14/3 SJTW Power Cord w/ 5-15 Receptacle
- LED Driver Capable of 120-277V 50-60Hz
- 5000K Color Temperature
- IP66 Rated – Suitable for Wet Locations
- cETLus Listed

PACK QUANTITY/UPC


- Pack Quantity = 2
- UPC# 8-03058-02471-0

VOLTEC POWER & LIGHTING
3230 E Imperial Hwy #218
Brea, CA 92821
909.606.1991

Fax: 909.606.0281
Email: customerservice@voltec-industries.com
Web: www.voltecpowerlighting.com

LED Temporary Area Work Light

08-00470, 08-00471, 08-00472

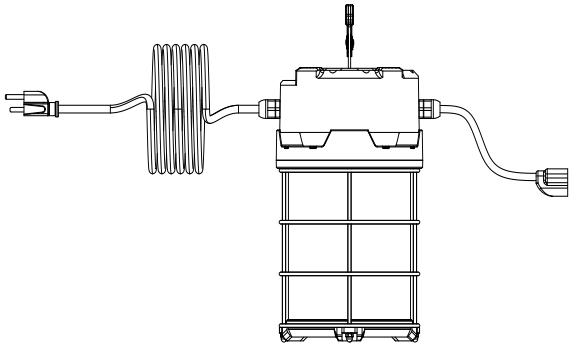

http://www.voltecpowerlighting.com/

BASIC INFO

Model	Power	Voltage	Lumen	
08-00470	100W	AC 120V	15000lm	Suitable for Wet Location
08-00471	150W	AC 120V	22500lm	
08-00472	200W	AC 120V	30000lm	

1. The driver of this work light can be worked at 120-277V. But the usage only under AC 120V meet the UL/ETL product certification standard.

2. Any modified conversion to these luminaires will immediately void the warranty.

Application:

Suitable for construction sites or any other location requiring a temporary work lamp.

CAUTION!!

·Make sure the distances between live part and metal part of the device can satisfy reinforce or double insulation.

·Before installation and maintenance of the device, please disconnect the power to prevent electric shock.


·The LED temporary work light must be installed in an approriate environment, operating in harsh environments may shorten the lifespan or even damage the device.

·Please keep the device away from any corrosive substance, clean with dry cloth only.

·To ensure personal safety, please make sure the device is staying firmly and securely when install on high places.

INSTALLATION INSTRUCTIONS

Warning: Please check and make sure there is no sign of physical damage to the product when unpacking. Do not use damaged product.




Step 1

Unfold the portable hook.


Step 2

Ensure the installation spot is strong enough to bear a mininum of 66lbs of weight.



Step 3

Plug the power cord to a power outlet. Turn on the device and see if the device is operating accordingly.



LINKABLE

Products use 14/3 cable

100W - Use only with this product. Connect up to 9pcs
150W - Use only with this product. Connect up to 6pcs
200W - Use only with this product. Connect up to 5pcs

